

TECHNICAL DATA SHEET

VMT standard exterior doors

Use	Doors for use externally in houses and apartments.		
Class	Unclassified.		
Technical data	Sound insulation:	31dB	
	Thermal transmittance:	U=0,87/1,2 W/m ² K	
Dimensions	See Table 1.		
Door leaf	Construction:	Door leaf with polyurethane foam core, moist resistant MDF/Al sheets and wood frame. Composite glass list.	
	Surface:	White paint (NCS S0502-Y)	
Fittings	Door leaf:	Lock: DORMA 9132 Hinges: 3248 (door part) 3pcs. Seal: S3417	
	Frame:	Hinges: 3248 (frame part) 3pcs. Lock plate: DORMA DS9001	
Weight Module 10x21:	Door leaf – 55 kg Frame M21x10 105mm – 20 kg		
Additional information	All door sets include standard frames. Door leaf is impregnated with special moist resistant primer.		
Product assembly and storage instructions	Product assembly and installation instructions can be found within a package of product. For product maintenance and instruction of complains see "Product description".		
Production and raw material supervision of the quality	Quality and origin of materials used in production of TORSO products are strictly controlled through all production and management processes in accordance with the relevant environmental management and control.		
Product quality warranty:	Warranty period of 5 years after the purchase. For more detailed information about quality complaint submission and definition of production guarantees, see "Product description".		


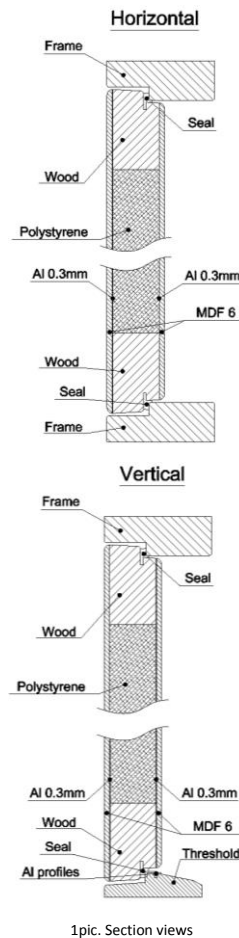


Table 1.

Module	Door leaf dimensions,mm		Frame dimensions,mm	
	Width	Height	Width	Height
M9x21	825	2040	886	2089
M10x21	925	2040	986	2089



Available designs

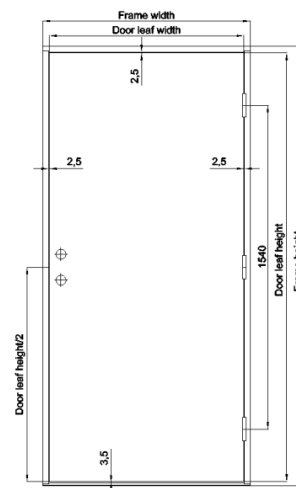